




# 7HFKQLFDO6SHFLILFDWLRQV

,WHP		EXS-AQUA67/A5% - No Arrow EXS-AQUA67/R5% - Arrow Right EXS-AQUA67/L5% - Arrow Left
	HVFULSWLRQ	LED Weatherproof IP67 IK10 Wall Mount 24m Exit Light c/w VHSUDUDWH5HPRWH%R[
,OSXW	9ROWD#)UHTXHQF\	230VAC ; 50Hz
	,QVWDOODWLRQ	Large terminal block and 20mm <sup>2</sup> cable entry
2XWSXW	/LKW6RXUFH	High performance LED bar, 100,000 hours
	ORBR12SHUDWLRQ	Maintained
	3RZHURQVXPSWLRQ	2W (standby)
	(PHU#HQFXUDWLRQ	> 120 minutes
RQWUROV	&DU#U	Intelligent 3-stage charger with <i>Synthium</i> <sup>TM</sup> battery management system
	3URWHFWLRQ	Overcharge, low voltage disconnect, overcurrent, short circuit
	7HVWLOQ)DFLOLW\	Manual test switch
	,QFDWRUV	Battery charger green LED
3KVLFDQ	LIIXVHU	Screen printed acrylic - pictographs as per part numbers above
	RQVWUXFWLRQ	Flame-retardant polycarbonate
	ORXQWLOJ	Surface mounted - wall or ceiling (single or double side application)
	LPHQVLRQV#	385mm x 185mm x 135mm
	,3,5DWLOJ	IP67, IK10
	:HLKW	2.5kg
(QURQPHQW	2SHUDWLOJ7HPSHUDWXUH	0 5
	5HODWL#XPLQW\	0 to 95%
RPSOLDQH	6WDQDUW	RCM / EMC, AS/NZS 2293, AS/NZS 60598.1
	6160DVVLILFDWLRQ	C0 E2.5 C90 E1.6
6FHVVRLHV	675#HOI7HVWDQ6HRSRUWLOJ	P/N: EXS-AQUA67/5%ST
	%,FRPSDWLEOH	P/N: EXS-AQUA67/5%DL
	6#(%,#):LUHOHV	P/N: EXS-AQUA67/5%RF
	5HSODFHPHQW%DWWHU\	P/N: BAT-AQUA67: <i>Synthium</i> <sup>TM</sup> LiFePO <sub>4</sub>


127( Product specifications subject to change without prior notice due to ongoing product improvement policy and changes to industry standards.

## LPHQVLRQV

% Exit Sign Box

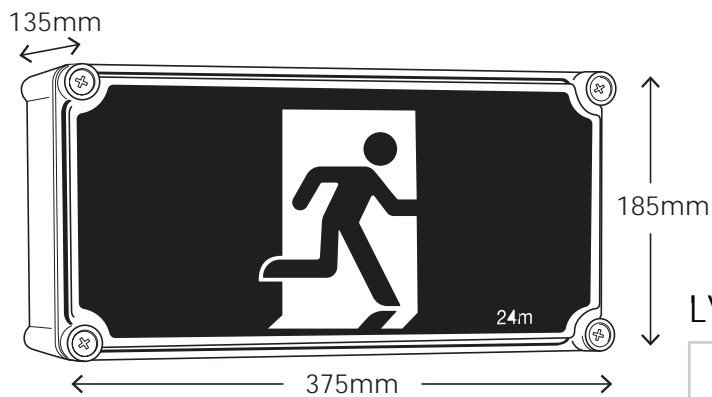

5HPRWH%ox

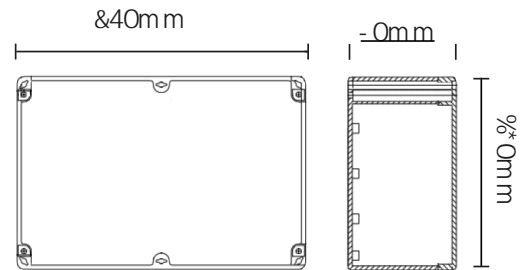

LWVULEXWH%#

