

EXODUS[™] EX-ZONE

**ZONE 1 / 21 HAZARDOUS AREA
MAINTAINED LED EXIT LIGHT**

A feature-packed and highly advanced Exit Sign to suit Zone 1 / 21 hazardous areas that offers many years of dependable and low maintenance Exit Lighting.

This wall mountable fixture is equipped with a unique central locking mechanism for increased levels of safety for use in a majority of hazardous area applications.




SYNTHIUM[™] nanotechnology is an advanced environmentally sustainable energy development that offers extended battery life, low cost of ownership, enhanced performance and improved safety.

Technical Specifications

Item	Part Number	Z21-EXIT
	Description	ZONE 1/21 LED IP66 24m Exit Light c/w <i>Synthium</i> ™ Battery
Input	Voltage & Frequency	230VAC ; 50Hz
	Installation	Large terminal block and 20mm ² cable entry
Output	Light Source	High efficacy LED strip, 100,000 hours
	Mode of Operation	Maintained
	Power Consumption	2W (standby)
	Emergency Duration	> 120 minutes
Controls	Charger	Intelligent 3-stage charger with <i>Synthium</i> ™ battery management system
	Protection	Overcharge, low voltage disconnect, overcurrent, short circuit
	Testing Facility	Manual test switch
	Indicators	Battery charger green LED
Physical	Diffuser	Running Man No Arrow pictogram only. Arrow Left or Right pictograms available on request
	Construction	Body: Bulk moulding compound (BMC), cover: polycarbonate
	Mounting	Surface mounted - wall (single side application only)
	Dimensions L x W x H	475mm x 200mm x 98mm
	IP Rating	IP 66
	Weight	1.2kg
Environment	Operating Temperature	-20° to +60°C
	Relative Humidity	0 to 95%
Compliance	Standards	RCM / EMC, AS/NZS 2293.1, AS/NZS 60598.1 IECEX Ex db mb eb op is q IIC T5/T6 Gb Ex op is tb IIIC 80°C/100°C Gb IP66
	AS/NZS 2293 Classification	N/A
	Accessories	Replacement Battery P/N: BAT-Z21E

NOTE: Product specifications subject to change without prior notice due to ongoing product improvement policy and changes to industry standards.

Dimensions

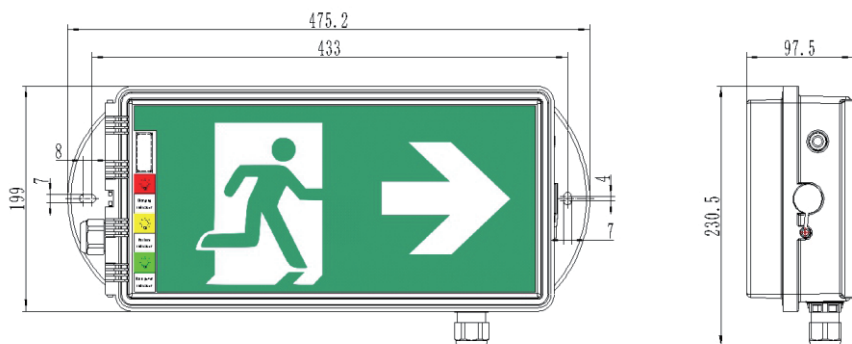

Distributed By:

